

Technical Specifications

| F | Total length footrest up | 75 cm |
|-----|--|---|
| | Total length footrest down | 97 cm |
| | Width standard configuration | 65 cm |
| | Width narrow armrest | 63 cm |
| | Seat height | 50 cm at the front, sloping 5° to the back |
| | Backrest height | 103 cm |
| | Turning radius | 73.5 cm |
| | Frame with articulated front lifting bar | Rigid steel, epoxy paint |
| | Seat width | Adjustable from 45 to 57 cm |
| \f\ | Seat depth front to back | Adjustable from 36 to 54 cm |
| * | Electrically reclining back +/- 40° | Fire-retardant washable tension fabric (M3) |

| A | Stand-up Electric actuators | LA31-3000-100 LA31-6000-150 |
|----------|---|---|
| (A) | Footrest adjustable to the rear | Height adjustment 60 mm |
| (F) | Front wheels | Ø 200 x 50 mm with maintenance- free tyres |
| F | Rear wheels | Ø 360 x 80 mm inflatable |
| | Motors Electric propulsion | 2 motors 300 W |
| Pr. | Speed | 6 or 10 km/h depending on version |
| ₩ | Battery life | > 25 km |
| | Batteries | 2 batteries AGM of 55 A 12 V |
| | Charger | 1 charger 8 A 24 V |
| | Weight of wheelchair Without batteries With batteries | 88 kg 118 kg |
| -5 | Maximum weight of user | 120 kg |




Distributed by

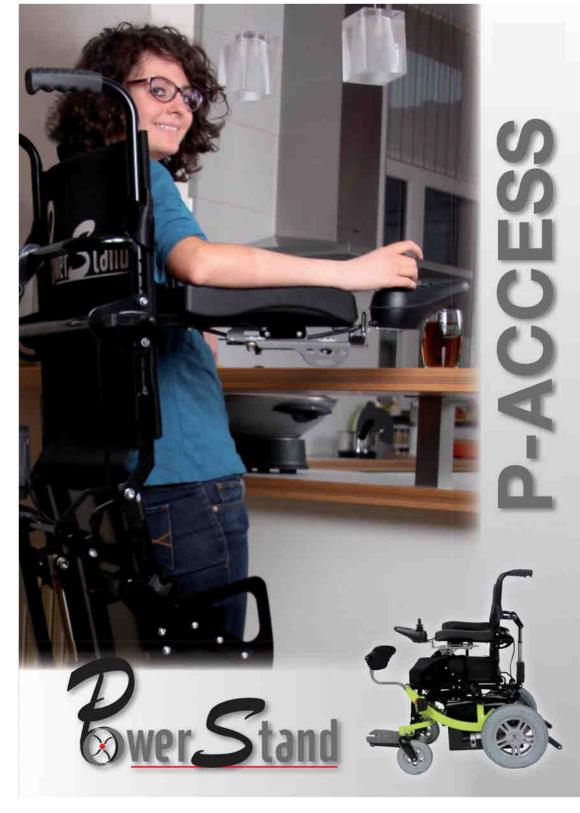









Retractable clothes guard.



Adjustable seat depth.



Very compact, it turns on its own axis, requiring a minimum amount of space. Its ride quality, both indoors and outdoors, makes it a pleasure to use on a daily basis.







